

FORM PTO-1390
(REV 11-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

C0249.AUD

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

09/424 915

INTERNATIONAL APPLICATION NO.
PCT/US98/11127INTERNATIONAL FILING DATE
June 2, 1998PRIORITY DATE CLAIMED
June 2, 1997

TITLE OF INVENTION

Method & Apparatus for Improving Classroom Amplification Systems and Other RF-Type Amplification Systems

APPLICANT(S) FOR DO/EO/US Franklin, David; Steele, Michael

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

Copy of Form PCT/IB/308; and
an Additional Copy of International Application
No. PCT/US98/11127

U.S. APPLICATION NO. (if known) 09/124915

INTERNATIONAL APPLICATION NO
PC/US98/11127ATTORNEY'S DOCKET NUMBER
C0249.AUD17. ☒ The following fees are submitted:**BASIC NATIONAL FEE** (37 CFR 1.492 (a) (1) - (5)):

Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$840.00

International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$760.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$960.00

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS** PTO USE ONLY

\$ 48.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	24 - 20 =	4	X \$18.00
Independent claims	2 - 3 =		X \$78.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00

\$ 36.00

\$

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 84.00

(Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).)

\$

SUBTOTAL =

\$ 84.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

+

TOTAL NATIONAL FEE =

\$ 84.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$

+

TOTAL FEES ENCLOSED =

\$ 84.00

Amount to be:

refunded

\$

charged

\$

- a. ☒ A check in the amount of \$84.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 05-0460. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Ira C. Edell
EPSTEIN, EDELL & RETZER
1901 Research Blvd., Suite 400
Rockville, Maryland 20850 US

SIGNATURE:

Ira C. Edell

NAME

24,119

REGISTRATION NUMBER

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN

Docket Number (Optional)
C0249.AUD

Applicant, Patentee, or Identifier: David Franklin
Application or Patent No.: Not Yet Assigned
Filed or issued: Herewith
Title: Method & Apparatus for Improving Classroom Amplification Systems and Other RF-Type Amplification Systems

I hereby state that I am

- ☐ the owner of the small business concern identified below.
☒ an official of the small business concern empowered to act on behalf of the concern identified below.

NAME OF SMALL BUSINESS CONCERN Audiological Engineering Corporation

ADDRESS OF SMALL BUSINESS CONCERN 35 Medford Street, Massachusetts 02143 US

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

- Each person, concern, or organization having any rights in the invention is listed below.
☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING David Franklin

TITLE OF PERSON IF OTHER THAN OWNER President CEO

ADDRESS OF PERSON SIGNING 35 Medford Street, Massachusetts 02143 US

SIGNATURE David Franklin DATE 11/29/99

METHOD AND APPARATUS FOR IMPROVING CLASSROOM AMPLIFICATION
SYSTEMS AND OTHER RF-TYPE AMPLIFICATION SYSTEMS

BACKGROUND OF THE INVENTION

Field of the Invention:

5 The present invention relates to a method and apparatus for transmitting and receiving RF signals in an amplification system, wherein sound detected by a microphone is transmitted as an RF signal to a remote receiver, audio-amplifier and loudspeaker which reproduces the sound. More particularly, the present invention relates to a classroom amplification system which employs technology found in cordless telephone transmitters/receivers to transmit and receive RF signals.

Description of the Related Art:

As is well known in audiological and teaching communities, many children in school, although classified as having normal hearing, have transient hearing loss due primarily to otitis media, more commonly referred to as middle ear infection. For reasons not entirely clear, this kind of infection has been increasing in prevalence for at least the past 20 years. The National Center for Health Statistics has developed data that indicates that this affliction, with accompanying mild hearing losses, increased by almost 45% in the period 1981 to 1988 and that the most common cause for doctor visits for children aged 15 or less during the period 1975 through 1990 was otitis media, showing an increase of 150% during that study period. For children less than 2 years of age, the increase in the same period was 224%. For 1990 alone, the number of children 15 or under reported as having otitis media was a staggering 19.8 million according to this same source.

It is well documented that this trend has resulted in some portion of so-called "normally hearing children" in classrooms actually being temporarily "hearing impaired" at least to some degree. One study conducted at a Midwestern suburban school, involving 282 children from six kindergarten and six first grade classrooms, none of whom was classified as hearing impaired, showed a failure rate when screened for hearing loss according to recommended standards as follows:

- For a screening in the fall season..... 33% failed
- For a screening in the winter season..... 34% failed
- For a screening in the spring season..... 27% failed

Thus, at any given time, between 27% and 34% of the children had some degree of hearing loss and, by means of questionnaires filled out by the parents, it was established that these transient hearing losses were directly associated with episodes of otitis media. Other studies of regular classrooms have shown similar results. Even more dramatic, studies in "special needs" classrooms have indicated the averages rise to about 75% of the children showing similar transient hearing losses with similar etiologies as causes.

Hearing losses in children, particularly in the earlier grades, can lead to poor performance, reduced classroom participation and development of poor learning and/or study skills. Thus, transient hearing loss is a growing problem with extremely serious consequences both for the children suffering hearing loss and for society at large.

Children with known, permanent hearing deficits are usually fitted with hearing aids or so-called "classroom trainers." This approach to alleviating a hearing loss problem is not practical in the context of transient hearing loss because of the large number of children afflicted, and because of the transient/floating characteristics of the problem, where at any given time it is not known which children are affected.

To address this problem, since roughly 1980, a number of researchers have been experimenting with what have come to be called "classroom amplification systems". In essence, these systems depend on some kind of battery operated transmitter and microphone worn by the teacher, a receiver/audio-amplifier installed in the classroom, and a number of loudspeakers arrayed about the classroom. These systems amplify the teacher's voice throughout the room so all children can hear without strain, even if they have mild, untreated hearing loss. The success of this approach has led to a growing number of companies whose primary focus is to design and install such systems nationwide.

In practice, the unsolved problem of signal interference in classroom amplification systems has limited deployment of such systems. Typically, radio frequency (RF) transmission is used to couple the teacher's voice to the receiver; however, the reserved band for this kind of hearing assistance system (72 MHz to 76 MHz) is subject to

interference from a variety of nearby sources such as television stations, CB transmitters, incidental interference from electrical appliances and the like. Other frequency bands, such as 49 MHz, 216 MHz, and 900 MHz, have been used in an attempt to obtain better performance; however, to date, the interference problem largely has not been solved.

At present, the best of the RF receiver/transmitters in the hearing impaired community incorporate at most 10 to 15 channels of analog narrowband FM capability with no special encoding or other means for minimizing the effects of interfering transmitters. Interference is typically avoided in such receivers by manually switching channels in both the transmitter and receivers independently of one another.

As a result of the interference problem, seldom can more than a few classrooms in any school have RF amplification systems before serious system functional degradation occurs due to interference among the adjacent classrooms. Furthermore, performance of classroom amplification systems may be degraded by interference from intermittent or permanent sources of RF interference in the vicinity of the school, depending on the school's location. Thus, despite the development of classroom amplification system technology over the course of many years, there remains a long felt need for a classroom amplification system capable of eliminating or mitigating the effects of interference with minimal user involvement.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an improved system and method for solving interference problems in classroom amplification systems and other RF-type amplifications systems.

It is another object of this invention to provide a simple and inexpensive approach, using RF transmitters and receivers from another industry not associated with the hearing impaired, to improve the performance of classroom amplification systems and other RF-type amplifications systems.

It is a further object of the present invention to automate RF channel selection in a classroom amplification system or other RF-type amplification system, such that minimal user involvement is required to identify and switch to a low-interference channel.

It is yet another object of the present invention to adapt the technology employed in cordless telephone systems to classroom amplification systems and other RF-type amplification systems.

It is yet a further object of the present invention to modify the circuitry of a cordless
5 telephone system to broaden the bandwidth of the system so that the circuitry is suitable for use in an amplification system.

The aforesaid objects are achieved individually and in combination, and it is not intended that the present invention be construed as requiring two or more of the objects to be combined unless expressly required by the claims attached hereto.

According to the present invention, an RF-type amplification system, such as a
10 classroom amplification system employs interference reduction technology adapted from a cordless telephone system. In particular, the amplifier system includes a portable remote unit which incorporates features of a portable handset of a cordless telephone and a base unit which incorporates features of a base unit of a cordless telephone.
5 Cordless telephones rely on RF transmission between the portable handset and the stationary base unit that is connected by wire to the telephone system and which serves as a battery charger for the handset when not in use. The transmission techniques employed in cordless telephones incorporate a number of features that reduce or eliminate interference. The present inventors have recognized that the technology
15 employed in cordless telephones can be adapted for use in the field of RF-type amplification systems, such as classroom amplification systems.

More specifically, the remote unit of the amplification system of the present invention includes a microphone for detecting a voice, such as that of an instructor, and for generating corresponding electronic voice signals. A transmitter of the remote unit
25 generates RF signals containing the voice signals (which, optionally, can be scrambled by the transmitter) as well as control signals provided by the central processing unit (CPU) of the remote unit. The control signals include a frequency identity code which indicates the remote unit's transmit frequency, a handshake code which is earlier downloaded from the base unit to the remote unit and which allows the base unit to
30 uniquely identify the remote unit as the source of the transmitted RF signals, and a descrambling code which allows the base unit to descramble the voice signals transmitted within the RF signal. The remote unit further includes an antenna for

transmitting the RF signals and for receiving RF signals from the base unit. Control signals received by the remote unit from the base unit are identified by a code detector and sent to the CPU for analysis.

The remote unit can be formed by modifying a conventional remote unit (handset) of a cordless telephone by: removing the packaging (i.e., the handset housing) and the alphanumeric keypad of the handset; removing the earpiece and the built-in microphone; adding an external microphone; and repackaging the function keys, circuitry (e.g., transmitter, receiver, CPU, etc.) and antenna with a housing suitable for attachment to an instructor's belt or the like. The resulting remote unit includes function keys for activating and deactivating the remote unit ("ON" and "OFF" keys), a "MUTE" key for muting the voice signal output from the base unit, and a "Channel Scan" key that allows the user to initiate an automatic channel scanning mode to identify a transmission channel that is substantially free of interference. The remote unit further includes a rechargeable battery which is charged by a battery charger of the base unit.

The base unit includes an antenna which receives the RF signals transmitted by the remote unit and a receiver which detects the RF signals and separates the RF signals into the constituent voice signals and control signals. The control signals are identified by a code detector of the base unit and evaluated by the CPU of the base unit. If the frequency identity code, handshake code and descrambling code transmitted by the remote unit and received by the base unit have the values expected by the base unit, the voice signals are processed through a speech network and provided at a communications interface of the base unit to an audio power amplifier which amplifies the voice signals and provides the amplified voice signals to room speakers which audibly project the voice signals as sound.

The communications interface of a cordless telephone is designed to receive an "off-hook" current from a telephone line, which "off-hook" signal activates the system when the handset is removed from its cradle on the base unit. In the amplification system of the present invention, this "off-hook" signal is provided by a DC power source which supplies a constant DC voltage to the communications interface whenever the system is in use. The base unit further includes a transmitter for transmitting control signals, but not voice signals, to the remote unit. Thus, there is one-way transmission

of voice signals (from the remote unit to the base unit) and two-way transmission of control signals between said remote unit and said base unit.

When the system user (e.g., an instructor) detects an unacceptable amount of interference on the transmission channel, the user can effect automatic selection of a low-interference channel by selecting the "Channel Scan" key. Selection of the "Channel Scan" key causes the remote unit to send a control signal to the base unit. In response to the control signal, the base unit scans different frequency channels by adjusting the frequency of a local oscillator in the receiver until a channel substantially free of interference is identified. The base unit then transmits this information to the remote unit which begins transmitting at the indicated frequency to avoid interference.

The control signals and the channel scanning features advantageously minimize interference in the amplification system, even where numerous sources of interference are present in the vicinity of the system.

Optionally, the communication circuitry of a cordless telephone can be further modified for use in an amplification system to broaden the bandwidth of the voice signals being transmitted to the base station. According to one approach, the bandpass filter in the remote unit, which limits the bandwidth of the voice signal, can be bypassed. According to another approach, a compressor circuit can be placed upstream of the bandpass filter, and an expander circuit can be placed downstream of the receiver in the base unit to obtain a wider bandwidth while still employing the bandpass filter of the original cordless telephone system.

The above and still further objects, features and advantages of the present invention will become apparent upon consideration of the following detailed description of a specific embodiment thereof, particularly when taken in conjunction with the accompanying drawings wherein like reference numerals in the various figures are utilized to designate like components.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagrammatic illustration of a classroom amplification system realized by using a modified portable "cordless" telephone circuit in accordance with an exemplary embodiment of the present invention.

Fig. 2 is a schematic illustration of a base unit of the classroom amplification system in accordance with the exemplary embodiment of the present invention.

Fig. 3 is a schematic illustration of a portable, remote transmitter/receiver unit of the classroom amplification system in accordance with the exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

It is observed by the present inventors that the extensive research and development of "cordless" telephones (i.e., telephones whose handset transmits and receives RF signals from a base unit, thereby not requiring a cord attachment to the handset) have resulted in inexpensive but very sophisticated transmitters and receivers whose capabilities far exceed those found even in the best RF systems currently being designed for hearing impaired communities. In particular, cordless telephone systems employ a number of techniques for reducing or avoiding interference. For example, it is common for cordless telephone systems to incorporate specific digital "handshaking" to assure that each unit in a transmitter/receiver pair receives messages only from the other unit. These transmitter/receiver pairs typically have automatic channel scanning features that enable a user to change channels easily and simultaneously with a single key stroke with further assurance that the channel change will be to a "clear" channel (one substantially free of interference). Many such cordless telephone systems include voice scrambling circuitry to assure that, even if there is some form of interference, it will appear as noise or garbled speech, so that there is no confusion as to the source. Such systems, even in the lower price and technological range, offer as many as 40 channels or more. At the higher end of the cordless telephone price and technology range, techniques such as spread-spectrum encoding, digital encoding of other descriptions, frequency agile automatic channel scanning, and as many as 170 channels or more are available to decrease the possibility of interference even further.

Classroom amplification systems and cordless phones have been developed and have existed in parallel for many years without any recognition that these technologies may be related or that certain aspects of cordless phone technology potentially could have application in the field of classroom amplification systems. In particular, throughout the years of largely unsuccessful attempts to solve the interference problems that have

long plagued classroom amplification systems, there has been no recognition or appreciation in the field of classroom amplification systems that cordless phone technology may be useful in addressing interference problems, and no efforts have been made to apply technology developed for cordless phones to classroom amplification systems or to other RF-type amplification systems.

The present inventors have recognized that the technology employed in cordless telephone systems can also be employed in RF-type amplification systems, such as classroom amplification systems, to address the unsolved problem of interference. In accordance with the present invention, an improved classroom amplification system incorporates technology adapted from cordless telephone systems.

A typical cordless telephone system includes a base unit and a battery-powered remote unit. The base unit is connected via a transformer to a power supply, such as a conventional AC power source, and transmits signals to and receives signals from a telephone network via a wire connection to a telephone line wall outlet or the like. The base unit includes a transmitter and an antenna for transmitting voice signals received over the telephone line to the remote unit as RF signals, along with control signals. The base unit further includes a receiver for receiving RF voice signals and control signals from the remote unit. The voice signals received by the base unit are conveyed to the telephone line via the wire connection.

The remote unit of a typical cordless telephone system has the shape of a conventional telephone handset, with a microphone disposed at one end, which is held near the user's mouth, for detecting the user's voice, and an earpiece at the other end, which is held near the user's ear, for generating audible voice signals from the RF voice signals received from the base unit. The remote unit also includes a transmitter and an antenna for transmitting RF voice signals of the user's voice detected by the microphone and control signals, and a receiver for receiving the RF voice and control signals from the base unit. An alphanumeric keypad disposed on the remote unit allows the user to enter digital information, such as a phone number or control information, which information is transmitted to the base unit. The keypad further includes function keys, such as the "ON" key; the "OFF" key; the "MUTE" key; and the "Channel Scan" key. When not in use, the remote unit can rest in a cradle of the base unit, while a battery charger of the base unit charges the battery of the remote unit.

In recognition of the special requirements of classroom amplification systems, and the different requirements of cordless telephones, modifications in both the functional operation and packaging of telephone receiver-transmitter equipment are required to make such equipment useful in this new application as a portion of a classroom amplification system.

Fig. 1 is a diagrammatic illustration of a classroom amplification system realized by using a modified portable (cordless) telephone circuit in accordance with an exemplary embodiment of the present invention. Referring to Fig. 1, there is shown a portable remote unit 87 which communicates with a base unit 82 via RF signals. While employing certain communications circuitry and hardware from a cordless telephone remote unit (handset), the remote unit 87 differs from cordless telephone remote unit in a number of important respects.

Whereas cordless telephone systems require an alphanumeric keypad as part of the remote battery-operated receiver/transmitter unit to enable phone dialing, it is preferable that classroom amplification systems have no such keypad. Hence, unlike the cordless telephone remote unit, remote unit 87 does not include an alphanumeric keypad. However, some of the key-operated functions of the telephone keypad are still required in the remote unit 87 of the present invention. As shown in Fig. 1, these function keys include: the "ON" key 185, which turns the unit on; the "OFF" key 186, which turns the unit off; the "MUTE" key 187, which temporarily mutes the voice signal reproduced by the system speakers; and the "Channel Scan" key 183, which enables the automatic scan feature which selects a "clear" channel in the event of interference.

Whereas the battery operated cordless telephone remote unit requires an internal (built-in) microphone, which is presented to the user's mouth when he uses the telephone, for the classroom amplification system, an external or remote microphone 151 (Fig. 1) is required, because the transmitter is usually worn by the instructor and clipped to the waist. Microphone 151 can be a tie-clip microphone, a head-worn microphone, or a so-called collar microphone, wherein a jack and appropriate bias voltage and load (if required) can be supplied for the microphone. Further, while the remote unit of the cordless telephone system requires an earpiece, in the classroom amplification application, the remote unit functions only as a transmitter, and no earpiece is required.

In view of these differences, remote unit 87 can be formed by modifying a cordless telephone remote unit in the following manner: removing the packaging (i.e., the handset housing) and the alphanumeric keypad; removing the earpiece and the built-in microphone; adding an external microphone; and repackaging the function keys, circuitry (e.g., transmitter, receiver, CPU, etc.) and antenna with a housing suitable for attachment to an instructor's belt or the like.

Referring again to Fig. 1, in operation, an instructor's voice detected by microphone 151 is converted into an RF signal by remote unit 87 and transmitted via remote unit antenna 168 through the medium of RF energy 17 and is received by antenna 107 located on the stationary base unit 82. Antennas 168 and 107 can be any antenna suitable for RF transmission and reception at the operating frequencies of the system. In particular, antenna 169 of remote unit 87 can be packaged within the housing of remote unit 87 or can be a retractable antenna that extends from the housing.

Base unit 82 of the amplification system employs features of a typical cordless telephone base unit. As with remote unit 87, however, base unit 82 is designed for use in an amplification system and therefore differs from a typical cordless telephone base unit in a number of important respects.

Base unit 82 is powered by wall transformer 80 in a manner similar to a typical cordless telephone base unit. However, in the usual telephone application, the base unit is also powered by a second line signal received at terminals T and R connected to a telephone line via a connecting wire. The cordless telephone base unit input connected to the telephone line is configured to sense an "off-hook" current supplied by the telephone company on the phone line when the phone circuit is closed by action of removing the handset and activating its circuit. It is this "off-hook" current that operates a relay thus making the transmitter/receiver circuit active.

For operation as part of a classroom amplification system, no such "off-hook" current is supplied. That is, in contrast to the telephone application, in the present invention, no line signal is received at terminals T and R of base unit 82 (Fig. 1), since base unit 82 is not connected via a wire to a telephone line wall outlet or the like. Thus, it is necessary to provide a power source to terminals T and R of base unit 82 along with an appropriate impedance to enable the system to operate properly. This requirement is met by applying an appropriate DC bias voltage across terminals T and R whenever

the classroom amplification system is operational. By way of example, a voltage of approximately plus or minus 12 volts DC is supplied from a voltage source 125 via a load of approximately 100 ohms, (shown as resistor 126) to terminal T (with terminal R being grounded). This combination of resistor and voltage operates as an internal relay (shown in Fig. 2) which in effect "answers the phone", making it operational. The communication interface (terminals T and R) of base unit 82, which is normally connected to a phone line in the telephone application, is connected to the input of an audio power amplifier 147 in the amplification system.

The internal circuits in base unit 82, among other operations, convert the RF signal received from remote unit 87 into a voice signal which is provided as an output at terminals T and R and is used as an input to audio power amplifier 147, which in turn drives the room loudspeakers (not shown). To protect the audio amplifier 147, it may be necessary to further supply a decoupling capacitor 89 of sufficient magnitude to decouple the 12 volt source 125 from the input of audio amplifier 147, but still pass the desired speech signal.

Fig. 2 is a schematic illustration of the wireless base unit 82, adapted from a telephone base unit, wherein, for simplicity, only the portions of the transmitter and receiver relevant to the present invention are illustrated. A cordless telephone system typically contains the battery charger/management system for the remote receiver/transmitter. This function is likewise required for the classroom amplification system. As shown in Fig. 2, base unit 82 includes a battery charger 140 having terminals adapted to receive charge terminals 193 of rechargeable battery pack 190 of remote unit 87 (see Fig. 3) when remote unit 87 is not in use.

Antenna 107 receives the RF signal transmitted by the remote unit 87, which signal contains both audio and digital control signal data. This RF signal is amplified by RF amplifier 108. The amplified RF signal and a signal generated by a local oscillator 115 are supplied to a mixer 114 which down-converts the amplified RF signal to an intermediate frequency (IF) signal. The IF signal is then delivered to an IF detector circuit 117. As part of its operation, IF detector circuit 117 separates the two portions of the signal into their respective elements; one portion being the audio component which is delivered to an audio amplifier 119; and the other portion being a digital signal which is

delivered to a code detector 118 which is connected to a central processing unit (CPU) 130 of the base unit.

After amplification in audio amplifier 119, the audio signal is delivered to a speech network 121. If the code detector 118 and CPU 130 determine that this audio signal is a legitimate one, derived from the proper remote transmitter 87, the audio signal is delivered via the activated "off-hook relay" 123 to a classroom audio power amplifier 147 which drives the classroom loudspeakers which project the instructor's voice throughout the classroom.

According to the usual methods employed in modern wireless telephones, the signal delivered to code detector 118 contains three pieces of digital information. The first piece of information is a code for the particular frequency being used by the remote transmitter unit 87. Since the selectivity of this receiver, as determined by the combination of mixer 114, local oscillator 115, and IF detector/narrowband amplifier 117, is very narrow, any RF signal received which results in an output through the tuned IF stage, must be of the proper RF frequency. However, if it is not accompanied by the proper frequency identity code as determined by code detector 118 and CPU 130, the CPU 130 will reject this signal and any derived speechband frequencies by sending an appropriate control signal to speech network 121 which instructs speech network 121 not to convey voice signals to the classroom audio power amplifier 147.

The second code contained in the signal recovered by code detector 118 is a "handshake" code. This code is stored in the CPU memory 180 (see Fig. 3) of the remote unit 87 whenever the remote unit 87 is placed in its charger 140 which, as illustrated in Fig. 2, is a part of the base unit 82. More specifically, the handshake code, which is stored in memory 129 of base unit 82, is retrieved by CPU 130 of base unit 82 and downloaded to CPU memory 180 of remote unit 87 (see Fig. 3) whenever remote unit 87 is being charged by charger 140. If this code does not match, CPU 130, via a control signal to speech network 121, will prevent any audio output from occurring through relay 123.

The third digital code contained in this signal is a descrambling code which is sent to the speech network 121 from CPU 130. The action of the descrambler signal is to decode the speech signal sent from the remote transmitter 87. The purpose of scrambling the speech-band signal is to provide security for normal phone operation.

That is, any RF receiver nearby the remote transmitters used to link the remote phone and its base unit cannot be used to listen to a conversation. In the present invention, where security is not a serious consideration, this feature still plays a valuable role in that, if any speech signal is intercepted by the base unit (i.e., an interfering signal not from the teachers remote unit), it will be acted upon by the descrambler to make it incomprehensible and incapable of being confused with the instructor's voice by students.

Even with these safeguards, interference can occur. Specifically, if a "legitimate" RF signal is received by base receiver 82 as transmitted by remote transmitter unit 87, then all three code signals required to allow output from relay 123 are present, and output will occur. If an interfering RF signal of the correct frequency is concurrently received by base receiver 82, it will be present in the audio output, along with the legitimate RF signal. Even though this output will generally be scrambled speech or simply noise, it is of course preferable that no such interference be present. Under these conditions, the action of the scan function built into remote transmitter 87 comes into play. In this situation, the user of the remote transmitter unit 87 pushes the channel scan button 183 (see Fig. 3) which results in a scan code appearing in code detector 118. The combined action of this new code, CPU 130 and speech network 121 progressively changes the frequency of oscillator 115 and looks for a new channel substantially free of speech frequency noise. When this action is completed, a new RF frequency code is transmitted to remote unit 87, and a new transmitter frequency is selected for transmitter (TX) oscillator 133, which is supplied to antenna 107 via RF amplifier 135 and transmitted to remote unit 87. When the action is completed, each unit operates on new transmit/receive frequencies.

It will be understood that the transmit frequency for the remote transmitter 87 and the transmit frequency for the base unit 82 are never the same. Hence, one has (as with normal telephone applications) the remote unit "receiver" tuned to the base unit transmitter frequency and the base unit "receiver" tuned to the remote unit transmitter frequency.

Fig. 3 is a schematic illustration of the remote transmitter/receiver unit 87 in accordance with the exemplary embodiment of the present invention, wherein only the portions of the transmitter, receiver and control elements relevant to the present

invention are shown. Referring to Fig. 3, a microphone 151 detects sound, such as the voice of an instructor. Microphone 151 can be any type of microphone suitable for detecting voice signals in the context of a portable device, including, but not limited to, a head-worn or "tie clip" microphone. The output of microphone 151 is amplified by audio-preamplifier 153 and bandpass filtered by bandpass filter 154. The resultant speech signal, by action of filter 154 is limited to the frequency range of approximately 300 Hz to 3300 Hz, as required for telephony, and is then amplified by amplifier 157 and presented to a transmitter (TX) oscillator circuit 160 where it is converted into the appropriate RF frequency for transmission via antenna 168 following amplification by RF amplifier 161.

In most modern wireless telephones the transmitter oscillator will have a second function, under control of the CPU, of scrambling the voice signal for the reasons described above in relation to Fig. 2. Additionally, CPU 179 adds the aforementioned digital codes into the audio signal and these codes are likewise converted by transmitter oscillator 160 into the appropriate RF format for transmission along with the converted voice signal.

When the composite signal is received by base unit 82, a "handshake" code is transmitted back to remote unit 87 and received via antenna 168, amplified by RF amplifier 170, and converted to a lower IF frequency by mixing, in mixer 174, the RF signal with a signal generated by a local oscillator 172. In the present invention for classroom amplification systems, unlike the application as a telephone, this received signal contains only digital encoding data, not speech data, so the portion of Fig. 3 dealing with this received signal indicates only the signal path for the digital portion of the received signal.

The received digital signal is fed to code detector 175 and then to the CPU 180. If the instructor does not request a new channel by pressing channel scan button 183 as described previously (which is generally the case under low-interference conditions), and the codes received match those that had been previously downloaded into remote unit 87, then the handshake is complete and the instructor's speech is transmitted as previously described. If the instructor does press the channel scan button 183, channel scanning is effected as previously described. Other instructor actions, such as pressing

"OFF" button 186 or "Mute" button 187, result in appropriate responses controlled by CPU 179 as shown.

5 The telephone bandwidth is limited by law (in the U.S.) to the band 300 Hz to 3300 Hz, necessitating the aforementioned bandpass filter 154 in remote unit 87, which limits the frequency band of the signal transmitted to base unit 82 to this frequency range. In contrast, it usually is desired (but not mandatory) that classroom amplification systems operate over a bandwidth extending from approximately 200 Hz to above 7,000 or 8,000 Hz. Consequently, it is desirable to modify the telephone circuit filtering to accommodate this wider bandwidth. The method for accomplishing this depends on the specific circuits used in the particular unit adapted for use in the RF-type amplification system. An example of one typical telephone circuit, in which a simple modification can be made to the portable transmitter to attain the desired increase in bandwidth is now described.

10 To increase the transmitted bandwidth beyond that specified for telephones, that is, to increase the bandwidth beyond 300 Hz through 3300 Hz as is normally used for the telephone system, bandpass filter 154 can either be bypassed entirely or it can be modified by well known means to extend the bandwidth up to that generated by microphone 151 and amplified by preamplifier 153. In some types of cordless telephone base units, there may be additional filtering provided in speech network 121 (see Fig. 2). In this event, it may be required also to modify a filter (if present) in the speech network to obtain the desired bandpass response.

15 Techniques for accomplishing this increase in bandwidth are well known to those skilled in the art of sound communication. These techniques most usually involve some form of digital compression upstream of the bandpass filter followed by re-expansion after reception by the base unit, although the use of analog or digitally implemented "bucket-brigade" techniques, are also applicable. Conceptually, these techniques can be implemented by modifying the existing circuitry of the cordless telephone system being adapted for use in the amplification system or by adding a processing block acting on the speech and/or other sound signal being received from the microphone prior to delivering the signal to the above described circuits of the system. In this realization, wherein the compressed signal resulting from the extra processing may be in a digital form, it may be desirable to reconstitute the signal into an analog form prior to presenting it to the transmitter circuits of the remote unit 87. After reception in the base unit 82, the

20
25
30

compressed signal can then be re-expanded by use of a separate processing block added to the existing base unit processing circuits described previously.

Referring specifically to digital techniques using bit compression/expansion, there are two classes of sound coder technologies which are applicable: (1) those referred generically to as "Vocoders", which apply specifically to speech signals produced by a single talker whose voice signal is not significantly corrupted by that of other sounds or another talker; and (2) "Waveform Coders", which apply to more general signals in the auditory range including multiple voices, music, sirens and other sounds which may occur. While either of these compression-type systems may be used for the purposes of this invention, the techniques involved can differ significantly in cost and complexity of algorithms, in whether or not the methods are proprietary, in compatibility with other voice communication systems, the degree of effective compression they offer and, most importantly in the context of the present invention, in time delays introduced by processing type and the voice quality ultimately resulting.

Inasmuch as the amount of compression required in the system of the present invention is small, for example 2:1 to compress a 7KHz signal into a 3.5KHz bandwidth, and a low cost system with a small amount of delay, say less than 10 milliseconds, is desirable, the Waveform Coders are well suited to the requirements of the present invention. Waveform Coders are characterized by less complex algorithms, lower time delays, good voice quality and most suitable for small ratio compressions. While compatibility with other equipments is not of great concern in this application, there are a number of non-proprietary methods available such as the ITU G.722 SB-ADPCM:64, 56 AND 48 kbps method which is non-proprietary standardized technique used most commonly for hands-free telecommunications and yields a high quality speech/sound signal with 7 kHz bandwidth. As understood in the art, there are many other similar means available which are suitable to accomplish bandwidth expansion, which are either standardized for the telephone industry or customized by software purveyors.

It will be understood that modifications and variations of the above-described exemplary embodiment can be made without departing from the scope of the invention. In particular, more than one remote unit/base unit pair can be used in a single classroom. For example, it may be desirable to amplify both the voice of a teacher and the voice of a teacher's aid within the same room. In this case, both the teacher and the teacher's

aid carry independent remote units, and two independent base units respectively receive signals from the two remote units at different frequencies. The two base units can be connected to a common (single) power amplifier system driving a common set of loudspeakers, or separate power amplification systems and/or loudspeakers can be used.

As explained above, a classroom amplification system remote unit employing cordless telephone technology receives a unique handshake code from a base unit each time the remote unit is placed in the base unit charging station for battery recharging. If a second remote unit is subsequently placed in the base unit charging station, the base unit will communicate only with the second remote unit, since the handshake code being used by the first remote unit is no longer the correct code (i.e., only the remote unit most recently placed in the charging station receives the current handshake code from the base unit). Accordingly, in the multiple remote unit/base unit pair environment, care must be taken to ensure that each base unit has most recently charged a different remote unit, so that each remote unit is using a valid handshake code corresponding to one of the base units.

More generally, an RF-type amplification system according to the present invention, such as a classroom amplification system, can employ the interference reduction/avoidance techniques found in cordless telephone systems while not necessarily being constructed with components from a cordless telephone. In particular, frequency identification, handshaking, voice signal descrambling, and channel scanning capabilities can be incorporated into any remote unit/base unit/power amplifier/loudspeaker arrangement to minimize interference. Optionally, a single remote unit can be configured to communicate with multiple base units simultaneously, or multiple remote units can be configured to communicate with a single base unit, provided that control signals, such as handshake codes, are distributed among the remote units and base units by appropriate messaging.

Having described preferred embodiments of a method and apparatus for improving classroom amplification systems and other RF-type amplification systems, it is believed that other modifications, variations and changes will be suggested to those skilled in the art in view of the teachings set forth herein. It is therefore to be understood

that all such variations, modifications and changes are believed to fall within the scope of the present invention as defined by the appended claims.

[illegible]

What is claimed is:

1. An RF-type amplification system, comprising:

a portable remote unit including: a microphone for detecting a voice and for generating corresponding voice signals; a central processing unit configured to generate control signals; a transmitter for generating first RF signals containing the voice signals and the control signals; an antenna configured to transmit the first RF signals and to receive second RF signals; and a receiver for detecting the second RF signals; and

a base unit including: an antenna adapted to receive the first RF signals from the remote unit; a receiver for detecting the first RF signals and for separating the first RF signals into the voice signals and the control signals; a communications interface configured to deliver the voice signals to an external device; a code detector for identifying the control signals; a central processing unit for evaluating the control signals and for controlling delivery of the voice signals from the communications interface in accordance with values of the control signals; and a transmitter for generating the second RF signals containing control signals but no voice signals, said second RF signals being transmitted to said portable remote unit via the antenna of the base unit, thereby effecting one-way transmission of voice signals and two-way transmission of control signals between said portable remote unit and said base unit.

2. The amplification system according to claim 1, wherein the control signals include: a frequency identity code which identifies a transmit frequency of said portable remote unit; a handshake code uniquely identifying said portable remote unit as the source of said first RF signals; and a descrambling code used by said base unit to descramble the voice signals received in the first RF signals.

3. The amplification system according to claim 2, wherein said portable remote unit further comprises a rechargeable battery and said base unit further comprises a battery charger adapted to charge the rechargeable battery.

4. The amplification system according to claim 3, wherein:

said base unit further comprises a memory coupled to the central processing unit of said base unit and adapted to store the handshake code; and

said portable remote unit further comprises a memory coupled to the central processing unit of said portable remote unit, the handshake code being downloaded from the memory of said base unit to the memory of said portable remote unit when the rechargeable battery of said portable remote unit is being charged by the battery charger of said base unit.

5. The amplification system according to claim 1, further comprising:

a DC voltage source which applies a constant bias voltage to the communications interface whenever the system is operating.

6. The amplification system according to claim 1, further comprising:

an audio power amplifier receiving the voice signals from the communications interface and amplifying the voice signals; and

a loudspeaker responsive to the amplified voice signals produced by said audio power amplifier, for projecting amplified, audible voice signals.

7. The amplification system according to claim 1, wherein said portable remote

unit further comprises a housing configured to be carried on a person, said microphone being external to said housing.

8. The amplification system according to claim 1, wherein said portable remote

unit further includes a channel scan selector for generating a scan code as one of said control signals, said base unit being responsive to the scan code to select a different transmit frequency for the transmitter of said portable remote unit.

9. The amplification system according to claim 1, wherein said portable remote

unit further includes:

a mute selector for preventing the communications interface from delivering the voice signals to an external device;

an ON selector for activating the system; and

an OFF selector for deactivating the system.

10. The amplification system according to claim 1, wherein said portable remote unit further comprises:

a compressor circuit responsive to the voice signals received from the microphone for compressing a bandwidth of the voice signals to a compressed bandwidth; and

a bandpass filter downstream of the compressor circuit and upstream of the transmitter of said portable remote unit, said bandpass filter receiving the compressed bandwidth voice signals and having a pass band corresponding to the compressed bandwidth;

and wherein said base unit further comprises:

an expander circuit responsive to the voice signals detected by the receiver of said base unit for expanding the compressed bandwidth of the voice signals.

11. The amplification system according to claim 10, wherein said compressor circuit and said expander circuit are one of: a vocoder and a waveform coder.

12. The amplification system according to claim 1, wherein the amplification system is a classroom amplification system for projecting a person's voice throughout a classroom, said portable remote unit being configured to be carried by the person.

13. The amplification system according to claim 12, wherein said classroom amplification system further includes:

an audio power amplifier system receiving the voice signals from the communications interface of said base unit and amplifying the voice signals; and

a loudspeaker system, including at least one loudspeaker disposed within the classroom, responsive to the amplified voice signals produced by said audio power amplifier system, for projecting amplified, audible voice signals throughout the classroom.

14. An method of amplifying sound, comprising the steps of:

producing voice signals from a detected voice;
generating first RF signals containing the voice signals and control signals;
transmitting the first RF signals from a portable remote unit to a base unit;
5 detecting the first RF signals at the base unit and separating the first RF
signals into the voice signals and the control signals;
delivering the voice signals from a communications interface of the base unit to
an external device only if the control signals received by the base unit have
predetermined values; and
10 transmitting second RF signals from the base unit to the portable remote unit,
wherein the second RF signals contain control signals but no voice signals, thereby
effecting one-way transmission of voice signals and two-way transmission of control
signals between the portable remote unit and the base unit.

15. The method according to claim 13, wherein the control signals include: a
frequency identity code which identifies a transmit frequency of said portable remote
unit; a handshake code uniquely identifying said portable remote unit as the source of
said first RF signals; and a descrambling code used by said base unit to descramble
5 the voice signals received in the first RF signals.

16. The method according to claim 15, further comprising the step of:
charging a rechargeable battery of the portable remote unit with a battery
charger of the base unit.

17. The method according to claim 16, further comprising the step of:
downloading the handshake code from a memory of the base unit to a memory
of the portable remote unit while the battery of the portable remote unit is being
charged.

18. The method according to claim 14, further comprising the step of:
applying a constant bias voltage to the communications interface whenever the
base unit is operating.

19. The method according to claim 14, further comprising the steps of:
amplifying the voice signals supplied from the communications interface; and
projecting an amplified, audible sound from the amplified voice signals.

20. The method according to claim 14, further comprising the step of:
disposing at least a portion of the portable remote unit in a housing configured
to be carried on a person.

21. The method according to claim 14, further comprising the step of:
sending a scan code from the portable remote unit to the base unit in
response to user selection of a channel scan function;
progressively changing a frequency of an oscillator of the base unit to identify
a transmission channel substantially free of interference;
transmitting a control code from the base unit to the portable remote unit
indicating a new transmission channel; and
transmitting the first RF signals at a frequency corresponding to the new
transmission channel.

22. The method according to claim 14, further comprising the steps of:
sending a mute control code from the portable remote unit to the base unit in
response to user selection of a mute function; and
preventing the communications interface from delivering the voice signals to an
external device in response to the mute control code.

23. The method according to claim 14, further comprising the steps of:
compressing a bandwidth of the voice signals to a compressed bandwidth;
passing the compressed bandwidth voice signals through a bandpass filter
having a pass band corresponding to the compressed bandwidth prior to transmission
to the base unit; and
expanding the compressed bandwidth of the voice signals after reception by
the base unit.

24. The method according to claim 14, further comprising the steps of:
disposing the portable remote unit on a person within a classroom;
disposing the base unit within the classroom;
amplifying the voice signals supplied from the communications interface; and
5 projecting an amplified, audible sound from the amplified voice signals
throughout the classroom.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212


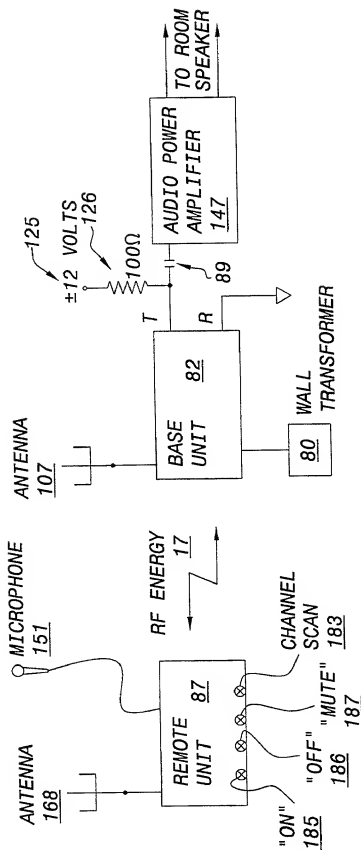


FIG. 1



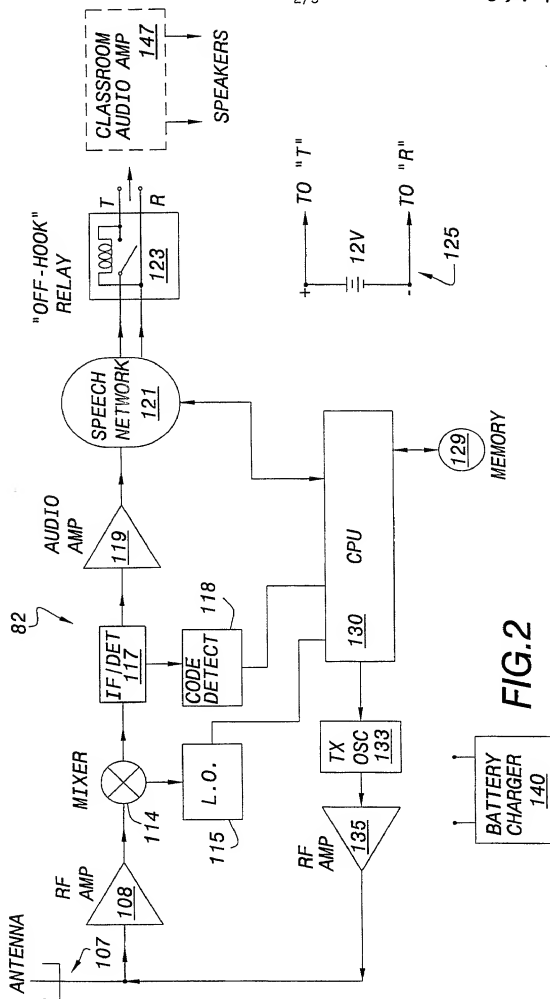

Please type a plus sign (+) inside this box → ☐

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☒ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number C0249.AUD

First Named Inventor David Franklin

COMPLETE IF KNOWN

Application Number /

Filing Date Filed Herewith

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Method & Apparatus for Improving Classroom Amplification Systems & Audiological Engineering Corporation

the specification of which *(Title of the Invention)*

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
60/048,329	06/02/1997	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box ☐

Approved for use through 9/30/00. OMB 0651-0002
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Patent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/US98/11127	06/02/1998	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☐ Customer Number OR ☒ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number
Robert H. Epstein	24,353	Stuart B. Shapiro	40,169
Ira C. Edell	24,119	J. Andrew McKinney, Jr.	34,672
Aaron B. Retzer	27,671	Patrick J. Finnan	39,169
Karen M. Gerken	31,161		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label OR ☒ Correspondence address below

Name	Ira C. Edell		
Address	Epstein, Edell & Retzer		
Address	1901 Research Blvd., Suite 400		
City	Rockville	State	MD
Country	U.S.	ZIP	20850
Telephone	(301) 424-3640	Fax	(301) 762-4056

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle if any)		Family Name or Surname	
David	Franklin		
Inventor's Signature	David Franklin 11/27/99		
Residence: City	Somerville	State	MA
Country	US	Citizenship	US
Post Office Address	9 Preston Road		
Post Office Address			
City	Somerville	State	Massachusetts
ZIP	02143	Country	US

☒ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☒

Approved for use through 03/08/08. OMB 0451-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.


DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
Michael				Steele			
Inventor's Signature	x <i>Michael Steele</i>			Date			
Residence: City	Seaford	State	NY/NY	Country	US	Citizenship	US
Post Office Address							
517 Seaman's Neck Road							
Post Office Address							
City	Seaford	State	NY	ZIP	11783	Country	US
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for

United States Patent & Trademark Office
Office of Initial Patent Examination – Scanning Division



SCANNED, # _____

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

There are 3 sheets of drawings

☐ *Scanned copy is best available.*